MODE D'EMPLOI

MATRICE HDMI™

Modèle. CBH4002



Cher client,
Merci d'avoir choisi ce produit. Pour une utilisation optimisée et sécurisée de l'appareil, lire attentivement ces instructions avant la connexion et la mise en service de ce produit. Conserver ce mode d'emploi pour une utilisation future.

CARACTERISTIQUES


A poser ou fixer au mur
Compatible système de contrôle infrarouge
Distribue 4 entrées HDMI sources, vers 2 sorties HDMI. Les 2 sorties pensent diffuser la même source ou une source différente.
Utilisation manuelle ou via télécommande fournie.
Dimensions du produit : L277mm x P156mm x H28mm

SPECIFICITES

Version HDMI : Haute Vitesse avec 3D
Version HDCP : HDCP 1.2
Compatible résolutions HDMI : 1080P/1080i/720P/576P/576i/480P/480i
Compatible format couleur vidéo : deep color 24bit/36bit
Compatible format audio : LPCM/Dolby-AC3/DTS7.1/DSD
Entrée signal vidéo : 5.0Volts P-P
Distance de câble en entrée et en sortie : câble 24AWG ≤ 20m
Vitesse de transfert des données : 6,75Gbps
Plage du niveau d'humidité opérationnel : 5 à 90%RH (sans condensation)
Plage des températures de fonctionnement : -15 à +55C°
Bloc d'alimentation : Entrée AC (50Hz.60Hz) 100- 240V
Sortie DC 5V-12V

INSTALLATION

1. Connecter les câbles HDMI des appareils sources HDMI aux ports HDMI entrées de la matrice HDMI
2. Connecter les câbles HDMI des appareils de destination (écran ou vidéo-projecteur) aux ports HDMI sorties de la matrice HDMI
3. Connecter le bloc d'alimentation 5V à la matrice HDMI.

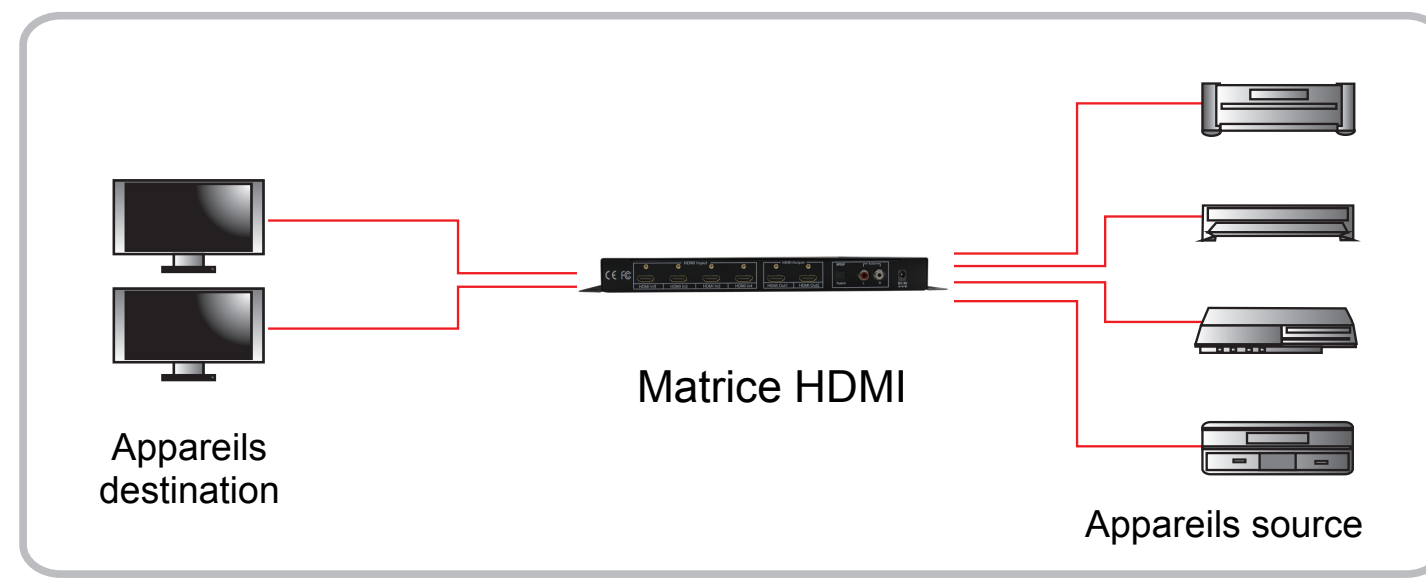

CONTENU DE LA BOÎTE

- 1 matrice HDMI
- 1 bloc d'alimentation
- 1 télécommande
- 1 mode d'emploi

ATTENTION

AFIN DE RÉDUIRE LES RISQUES D'INCENDIE, DE COURTS-CIRCUITS ET DE DÉTÉRIORATION DE L'APPAREIL :
1. Ne pas exposer l'appareil à la pluie, la moisissure, les éclaboussures et ne pas placer à proximité d'objets contenant du liquide tel que des vases ou autres
2. Ne pas installer cet appareil dans une bibliothèque ou autre meuble fermé. S'assurer que le matériel bénéficie d'une bonne ventilation
3. Afin d'éviter tous chocs électriques ou incendie dus à une élévation de la température, ne pas obstruer les ouvertures de ventilation par des journaux, linge de maison, rideaux ou autres
4. Ne pas installer à proximité de sources de chaleur tel que des radiateurs
5. Ne pas placer cet appareil à proximité d'une cheminée ou bougie
6. Nettoyer cet appareil uniquement avec un chiffon sec
7. Débrancher tous les périphériques de votre appareil en cas d'orage ou de longue période sans utilisation
8. Protéger les cordons d'alimentation afin de ne pas marcher dessus ou les détériorer 9. N'utiliser que les accessoires fournis avec ce produit
10. Pour tous compléments d'informations et interventions, prendre contact avec un service après vente qualifié

Importé par BAF - 14730 Giberville - FRANCE

INSTRUCTION

HDMI™ MATRIX

Model No. CBH4002



Dear customer,
Thank you for purchasing this product !
For optimum performance and safety, please read these instructions carefully before connecting, operating or adjusting this product. Please keep this manual for future reference.

FUNCTION


Smart desk or wall mounting
Support IR control system
4 HDMI inputs and 2 HDMI display sinks. Any input to any output. The 2 outputs can be different or the same.
Switching control via remote or manual.
Dimensions of the product : L277mm x P156mm x H28mm

SPECIFICATION

HDMI version : High Speed with 3D
HDCP version : HDCP 1.2
Support HDMI resolution : 1080P/1080i/720P/576P/576i/480P/480i
Support video color bit : deep color 24bit/36bit
Support audio format : LPCM/Dolby-AC3/DTS7.1/DSD
Input video signal : 5.0Volts P-P
Input and output cable distance : ≤ 20m 24AWG cable
Data transfer speed : 6,75Gbps
Operating humidity range : 5 to 90%RH (no condensation)
Operating temperature range : -15 to +55C°
Power supply : Input AC (50Hz.60Hz) 100- 240V
Output DC 5V-12V

OPERATION

1. Connect the signal source (such as HD-DVD, PS3, STB) with HDMI input interfaces
2. Connect the display devices (such as HD-LCD, HD-DLP) with HDMI output interfaces
3. This device is powered by an external power supply (included)

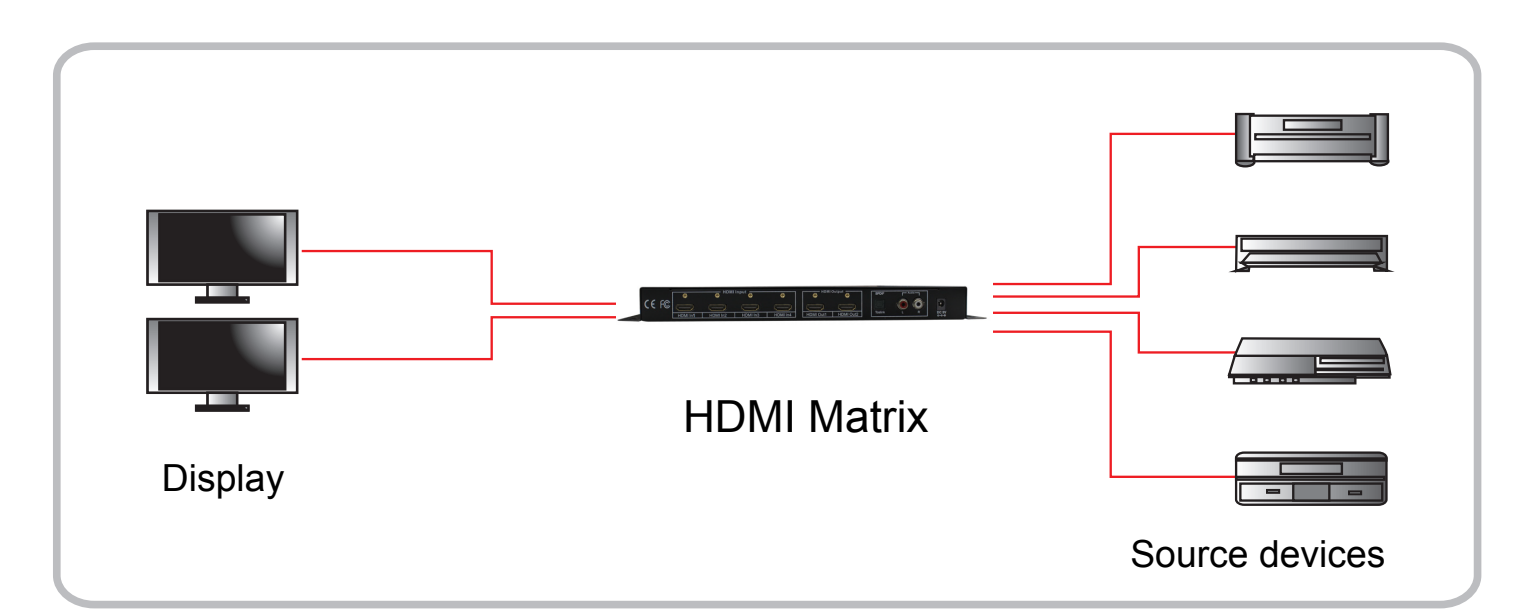

PACKING LIST

- 1 HDMI matrix switch
- 1 power supply
- 1 remote control
- 1 user manual

WARNING

TO REDUCE THE RISK OF FIRE, ELECTRIC SHOCK OR PRODUCT DAMAGE :
1. Do not expose this apparatus to rain, moisture, dripping or splashing and make sure that no objects filled with liquids, such as vases, are placed on the apparatus.
2. Do not install or place this unit in a bookcase, built-incabinet or in another confined space. Ensure the unit is well ventilated.
3. To prevent risk of electric shock or fire hazard due to overheating, do not obstruct the unit's ventilation openings with newspapers, tablecloths and similar items.
4. Do not install near any heat sources such as radiators, heat registers, Stoves or other apparatus.
5. Do not place sources of naked flames, such as lighted candles on the unit.
6. Clean this apparatus only with dry cloth.
7. Unplug this apparatus during lighting storms or when unused for long time.
8. Protect the power cord from being walked on or pinched, particularly at plugs.
9. Only use attachments/accessories specified by the manufacture.
10. Refer all servicing to qualified service personnel.

Imported by BAF - 14730 Giberville - FRANCE